
VENTUM 762





FOR ANY OCCASION

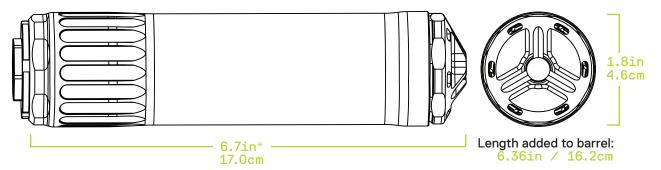

PRODUCT SPECIFICATIONS

Weight	15.0oz / 425g*	Mounts	Direct thread 5/8 x 24 (QD Hub compatible)
Caliber	5.56, 6.5, 7.62, .308, 6mm, 7mm, 300 WM, 300 PRC, 30-06	Barrel Length	No restrictions
Bolt Velocity	Up to ±4% change from base, dependent on system.	Durability	Passes 6 cycles of the SOCOM Reliability Stress Test. (1 cycle=8x30 round magazines)
Materials	Grade 5 Titanium Core; 17-4 Heat Treated Stainless Steel Housing	Maintenance	Detailed cleaning should be performed every 2,500 rounds.
Coating	Black Nitride QPQ		

WARRANTY INFORMATION

HUXWRX provides a limited lifetime warranty against all manufacturing defects on all products manufactured by HUXWRX Safety Co. and OSS Suppressors. For more information, visit www.huxwrx.com/warranty.

*Without mount